

# LINER MATERIAL IS: POLYETHYLENE




OPERATING SPECIFICATIONS ARE:  
MAXIMUM PRESSURE 10.5 BAR (150 PSIG)  
MAXIMUM TEMPERATURE 49°C (120°F)  
MINIMUM TEMPERATURE 1°C (34°F)

FLEXIBILITY IN PIPING OR FLEX CONNECTORS ARE RECOMMENDED.

THIS VESSEL IS ONLY APPROVED FOR WATER PRESSURE USE. ALL OTHER USES OR SOLUTIONS TO BE USED MUST BE APPROVED BY MANUFACTURER.

THIS VESSEL NOT TO BE USED FOR PNEUMATIC OR HYDRO-PNEUMATIC APPLICATIONS.

VESSEL MUST NOT BE EXPOSED TO TEMPERATURE BELOW -29°C (-20°F)

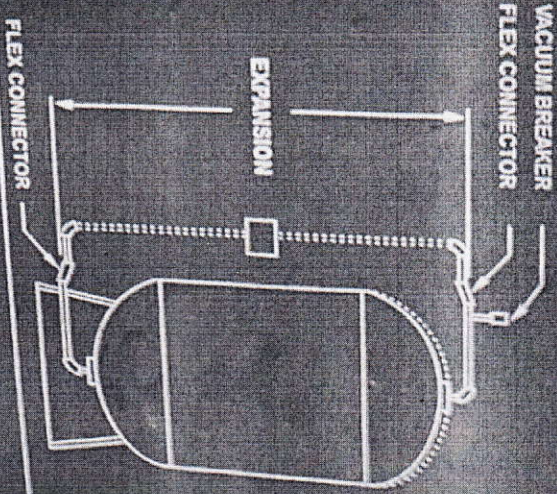

MFR# N0915AW050

MADE BY WAVE CYBER FOR EUROTRON SPA

SIZE:  
**3072**

- COMPLIES WITH ALL REQUIREMENTS OF P.E.D. 97/23/EC DIRECTIVE
- SUITABLE FOR DRINKING WATER FOLLOWING KTW RECOMMENDATIONS

## WARNING

- 1) TANK IS RATED FOR AN INTERNAL NEGATIVE PRESSURE OF 5" HG VACUUM BELOW ATMOSPHERIC. IF NEGATIVE PRESSURE EXCEEDS 5" HG NEGATIVE PRESSURE, AN ADEQUATE VACUUM BREAKER MUST BE INSTALLED BETWEEN THE TANK INLET AND ANY VALVES. (REFER TO PICTURE)
- 2) SYSTEM CONNECTIONS TO THE TANK MUST ACCOMMODATE LONGITUDINAL EXPANSION BETWEEN SIDE, AND TOP AND BOTTOM OPENINGS. FLEXIBILITY IN PIPING OR FLEX CONNECTORS ARE RECOMMENDED.